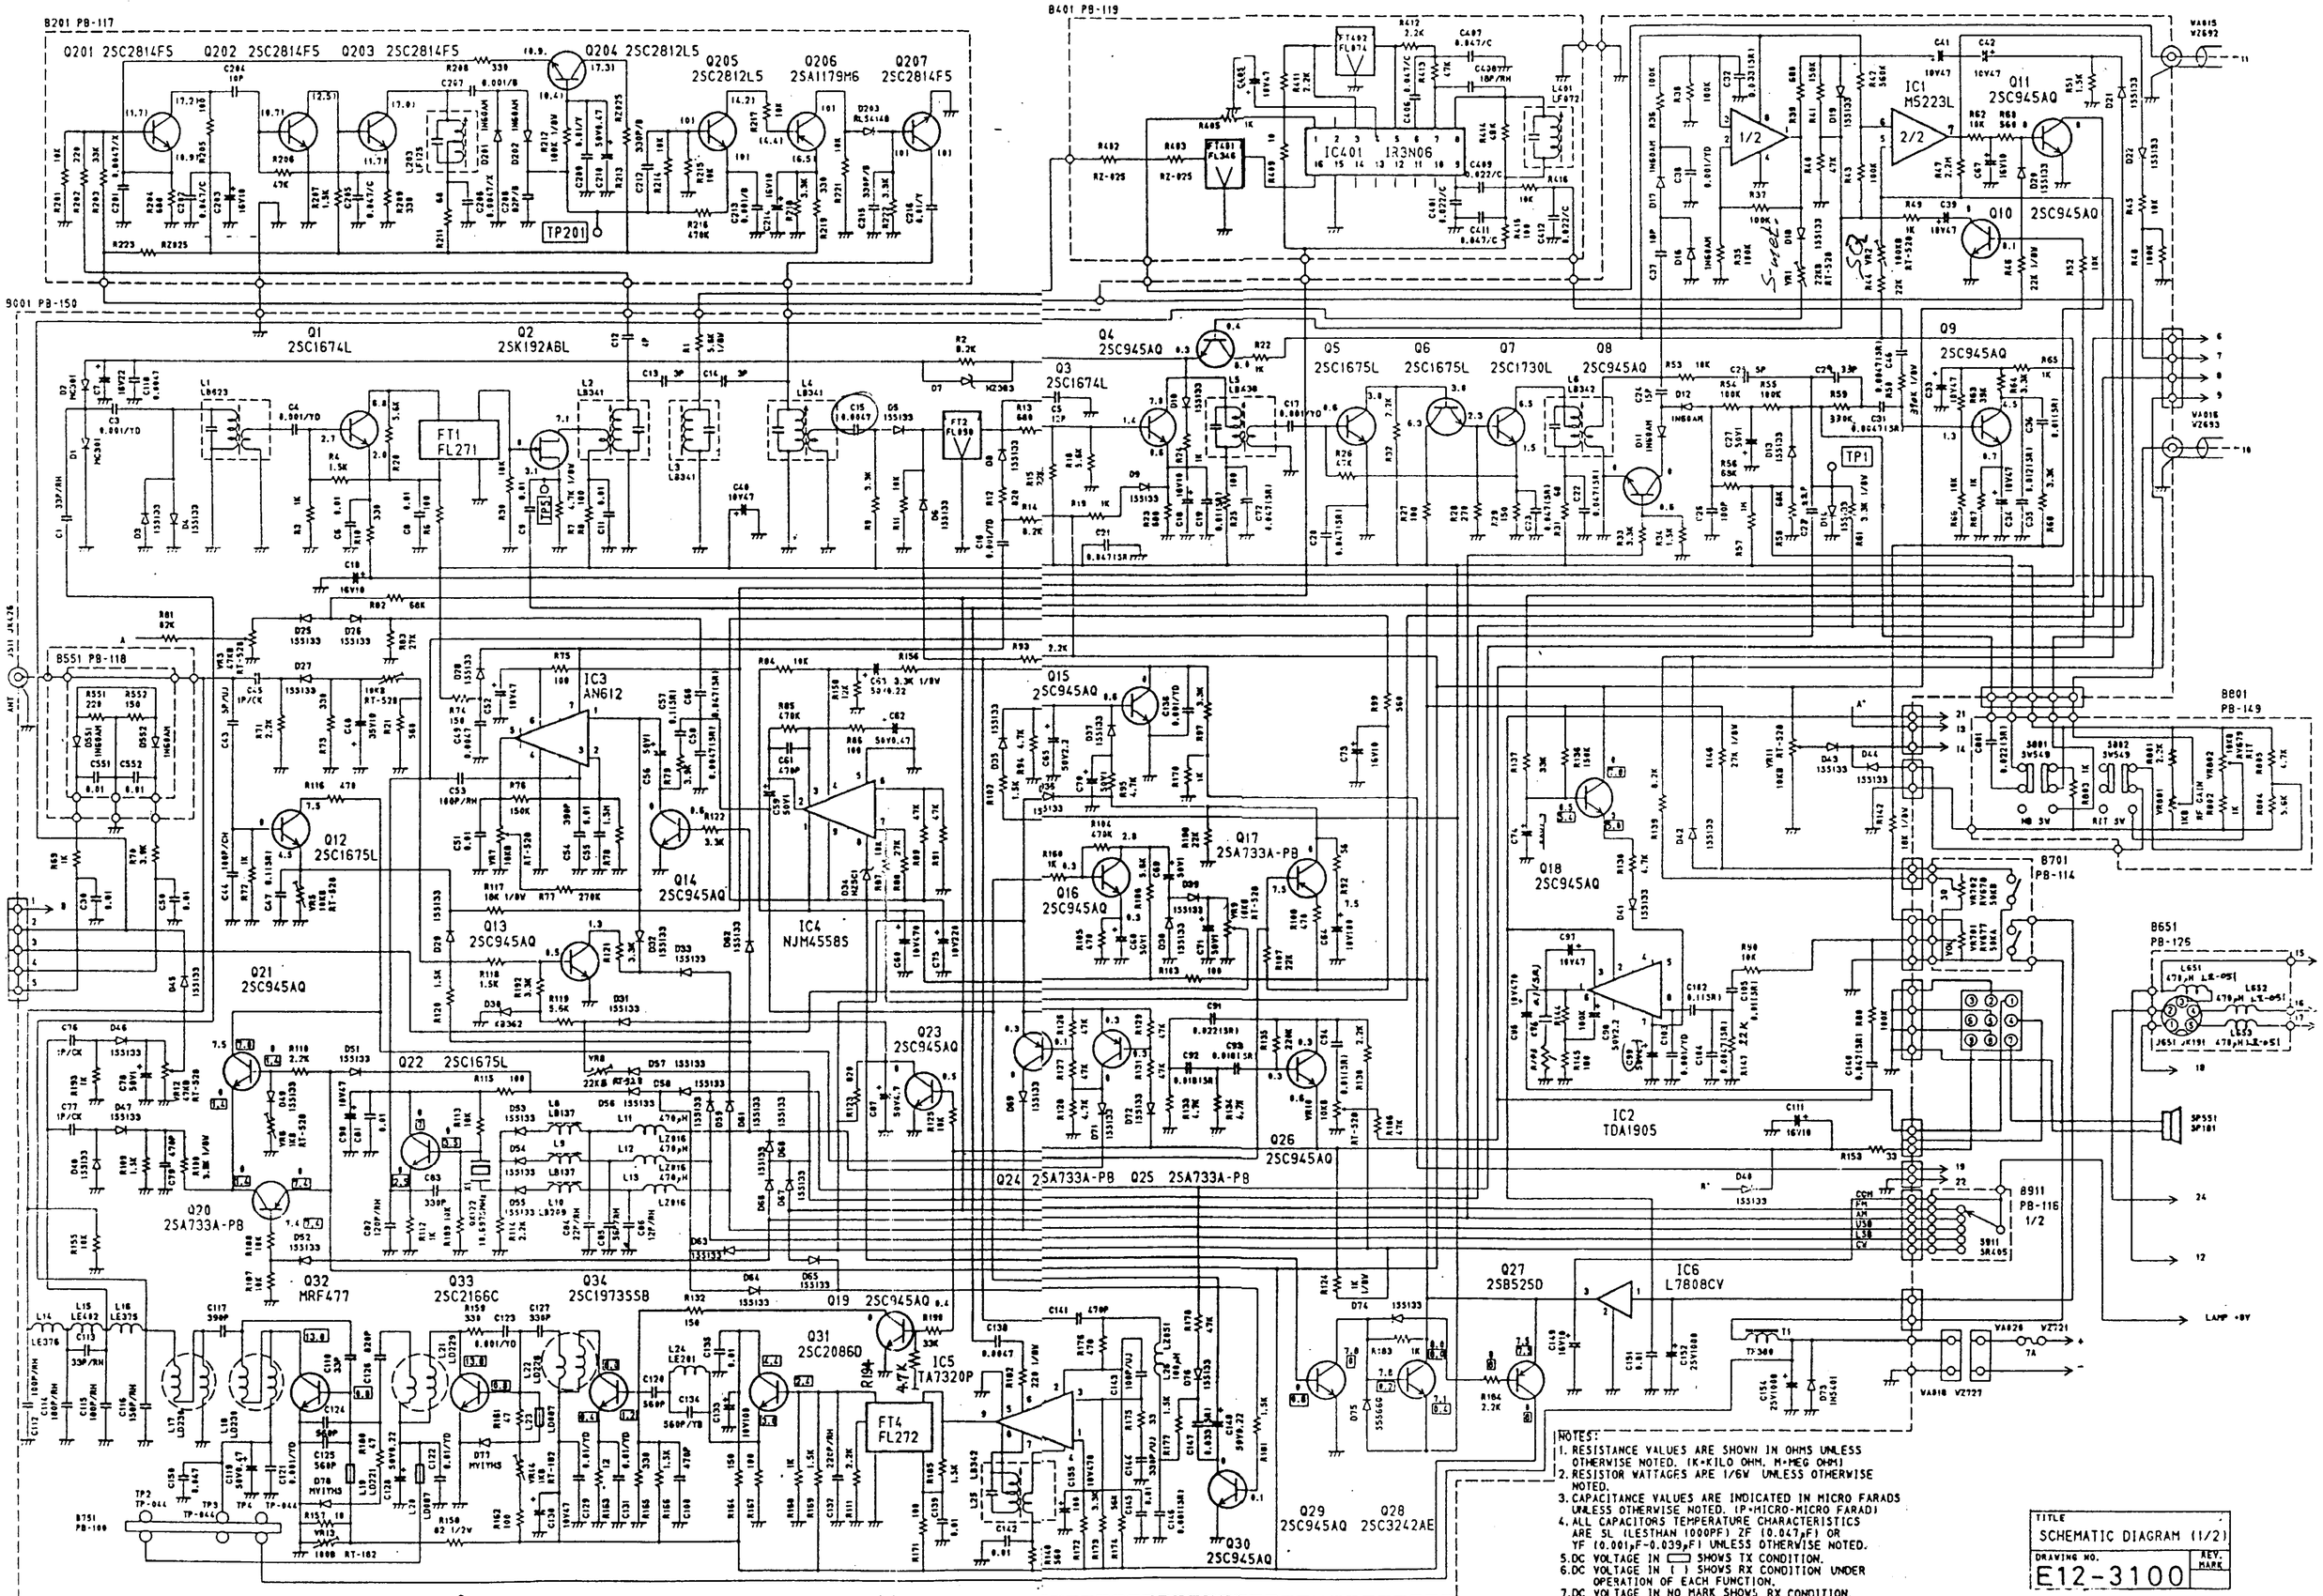

NOTES:
1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED. (K=KILO OHM, M=MEG OHM)
2. RESISTOR WATTAGES ARE 1/6W UNLESS OTHERWISE NOTED.
3. CAPACITANCE VALUES ARE INDICATED IN MICRO FARADS UNLESS OTHERWISE NOTED. (P=MICRO-MICRO FARAD)
4. ALL CAPACITORS TEMPERATURE CHARACTERISTICS ARE SL (LESTHAN 1000PF) ZF (0.047μF) OR YF (0.001μF-0.039μF) UNLESS OTHERWISE NOTED.
5. DC VOLTAGE IN ▭ SHOWS TX CONDITION.
6. DC VOLTAGE IN ( ) SHOWS RX CONDITION UNDER OPERATION OF EACH FUNCTION.
7. DC VOLTAGE IN NO MARK SHOWS RX CONDITION.
8. RESISTOR WATTAGES ARE 1/6W FOR B201,B401.

TITLE	SCHEMATIC DIAGRAM (1/2)
DRAWING NO.	E12-3100
REV. MARK	